



LX-ADP03 manual

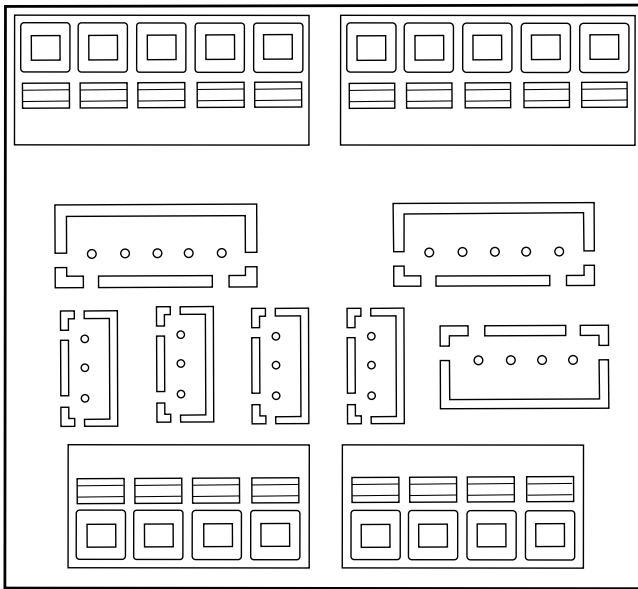


Technical data

Size:	57x52x37 with DIN-feet
Weight:	43g with DIN-feet
Connector types:	<ul style="list-style-type: none">* 2x 5p 5.08 Phoenix push-in spring terminals for CAN bus* 2x 5p 2.50 JST connector terminals for CAN bus* 4x 3p 2.00 JST connector terminals for IOs, including power and ground* 1x 4p 2.50 JST connector terminal for IO signals* 1x 4p 5.08 Phoenix push-in spring terminal for power* 1x 4p 5.08 Phoenix push-in spring terminal for IO signals

Wiring instructions

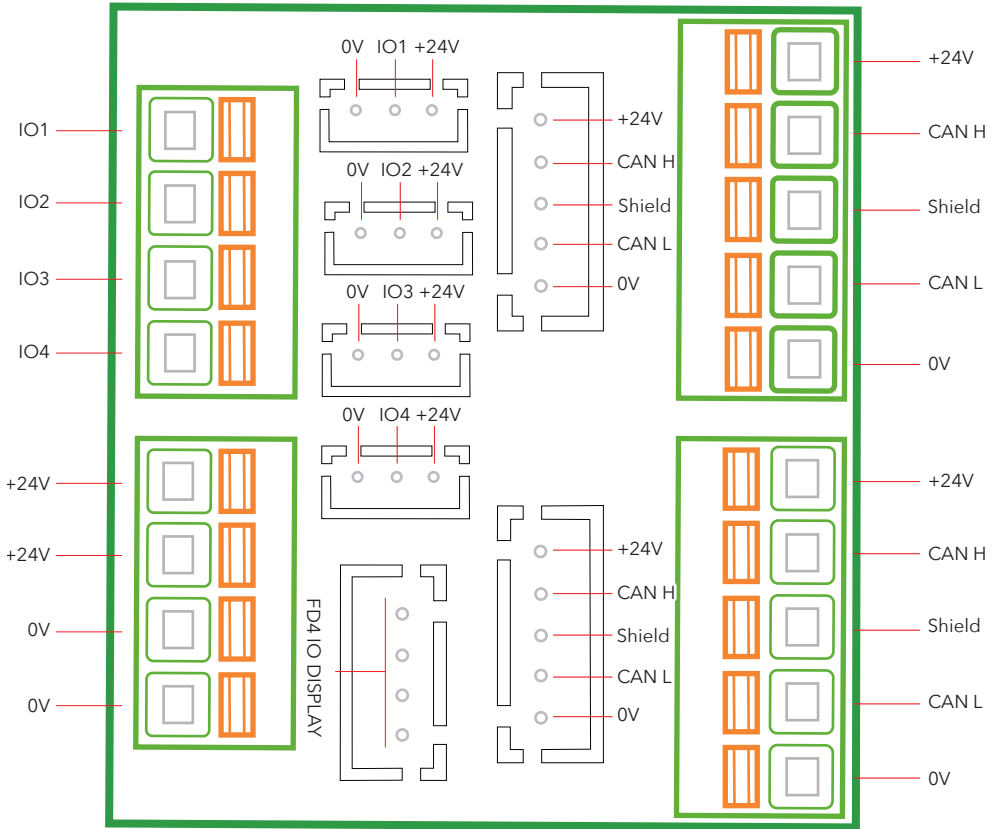



SafeLine Headquarters

Antennvägen 10 · 135 48 Tyresö · Sweden
Tel.: +46 (0)8 447 79 32 · info@safeline.se
Support: +46 (0)8 448 73 90

SafeLine Denmark

Erhvervsvej 19 · 2600 Glostrup · Denmark
Tel.: +45 44 91 32 72 · info-dk@safeline.se

SafeLine Norway

Solbråveien 49 · 1383 Asker · Norway
Tel.: +47 94 14 14 49 · post@safeline.no

SafeLine Europe

Industrierrein 1-8 · 3290 Diest · Belgium
Tel.: +32 (0)13 664 662 · info@safeline.eu
Support: +32 (0)4 85 89 08 95

SafeLine Deutschland GmbH

Kurzwannstraße 3 · D-68526 Ladenburg · Germany
Tel.: +49 (0) 6203 840 60 03 · sld@safeline.eu

SafeLine Group UK

Unit 47 · Acorn Industrial Park · Crayford ·
Kent · DA1 4AL · United Kingdom
Tel.: +44 (0) 1322 52 13 96 · info@safeline-group.uk

SafeLine is a registered trademark of SafeLine Sweden AB. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.