


CABLE11 manual

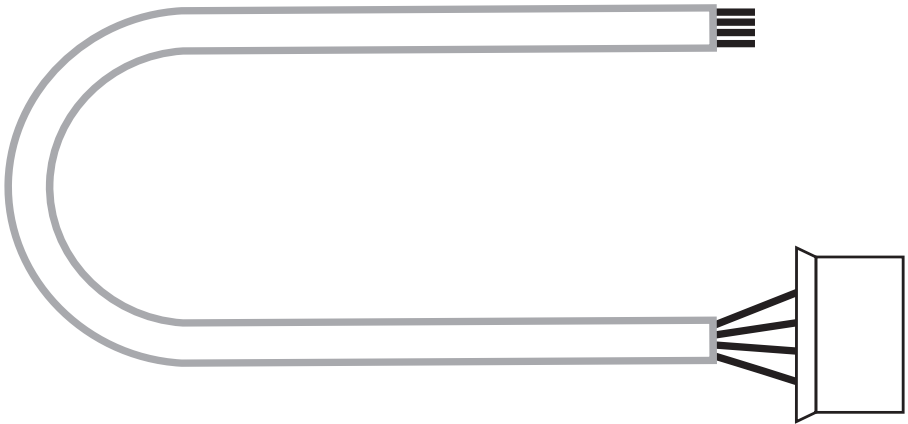

Technical data

| | |
|------------------------|----------------------|
| Length: | 3000 mm |
| Conductor size: | 0,25 mm ² |
| Cable type: | Round 4P |
| Connectors: | JST XHP-4 / Open end |
| Pitch: | 2,5 mm |
| Art.no.: | *CABLE11 |

CAN cable for our IO connections.

A three meter cable with a 4-pole JST contact in one end and the other open. A handy cable designed to transfer the in- and output signals, including ground and power feed, to our CANopen products i.e. *IO2-CAN, *IO4-CAN and *IO8-CAN. It is easily installed due to the matching JST-connectors.

Technische Daten

| | |
|----------------------------|--------------------------|
| Länge: | 3000 mm |
| Adern- Durchmesser: | 0,25 mm ² |
| Kabeltyp: | Rund 4P |
| Anschlüsse: | JST XHP-4 / Offenes Ende |
| Pitch: | 2,5 mm |
| Art.Nr.: | *CABLE11 |

CAN- Kabel für unsere IO- Verbindungen.

Ein drei Meter langes Kabel mit einem 4- poligen JST Stecker an einem Ende, das andere Ende ist offen. Ein handliches Kabel zur Übertragung der Ein- und Ausgangssignale, einschließlich Erdung und Stromversorgung an unsere CANopen- Produkte *IO2-CAN, *IO4-CAN und *IO8-CAN. Durch die passenden JST-Stecker ist es einfach zu installieren.



Teknisk data

| | |
|------------------------|----------------------|
| Längd: | 3000 mm |
| Omkrets ledare: | 0,25 mm ² |
| Kabeltyp: | Rund 4P |
| Anslutning: | JST XHP-4 / Öppen |
| Delning: | 2,5 mm |
| Art.nr.: | *CABLE11 |


CAN-kabel för våra IO-anlutningar.

En tre meter lång kabel med 4-polig JST-kontakt i ena änden, öppen i andra. En lätthanterlig kabel framtagen för att användas för in-/utgångsanslutningar på till exempel *IO2-CAN, *IO4-CAN och *IO8-CAN. Installeras enkelt tack vare matchande JST-kontakter.

Connection
Verbindung
Anslutning

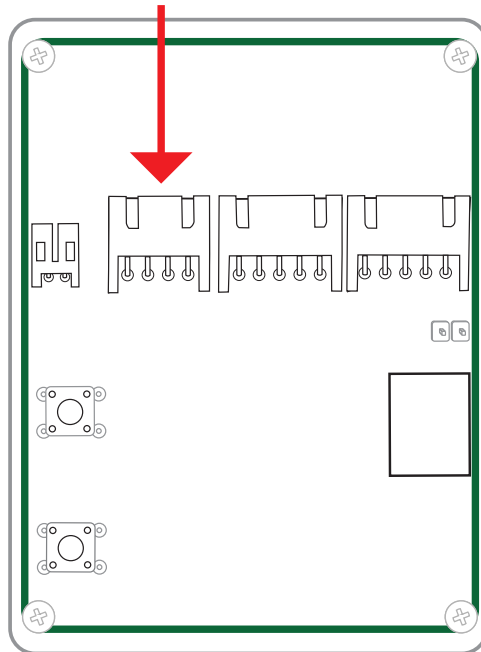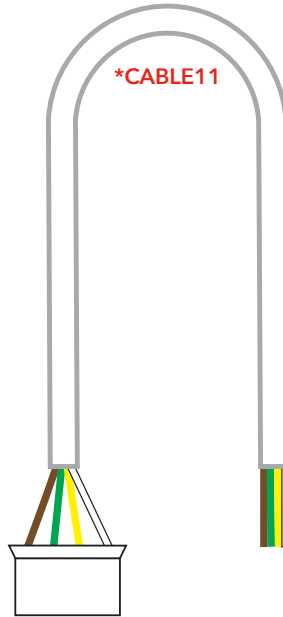

***FD4-CAN**



SafeLine Headquarters

Antennvägen 10 · 135 48 Tyresö · Sweden
Tel.: +46 (0)8 447 79 32 · info@safeline.se
Support: +46 (0)8 448 73 90

SafeLine Denmark

Vallensbækvej 20A, 2. th · 2605 Brøndby · Denmark
Tel.: +45 44 91 32 72 · info@safeline.dk

SafeLine Norway

Solbråveien 49 · 1383 Asker · Norway
Tel.: +47 94 14 14 49 · post@safeline.no

SafeLine Europe

Industrieweg 114 · 3980 Tessenderlo-Ham · Belgium
Tel.: +32 (0)13 664 662 · info@safeline.eu
Support: +32 (0)4 85 89 08 95

SafeLine Deutschland GmbH

Kurzgewannstraße 3 · D-68526 Ladenburg · Germany
Tel./Support: +49 (0)6203 840 60 03 · sld@safeline.eu

SafeLine Group UK

Unit 47 · Acorn Industrial Park · Crayford ·
Kent · DA1 4AL · United Kingdom
Tel.: +44 (0) 1322 52 13 96 · info@safeline-group.uk

SafeLine is a registered trademark of SafeLine Sweden AB. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.